


KKRF

KAYIŞ KASNAK TAHRİKLİ ALÇAK BASINÇLI RADYAL FANLAR BELT-DRIVEN LOW PRESSURE RADIAL FANS

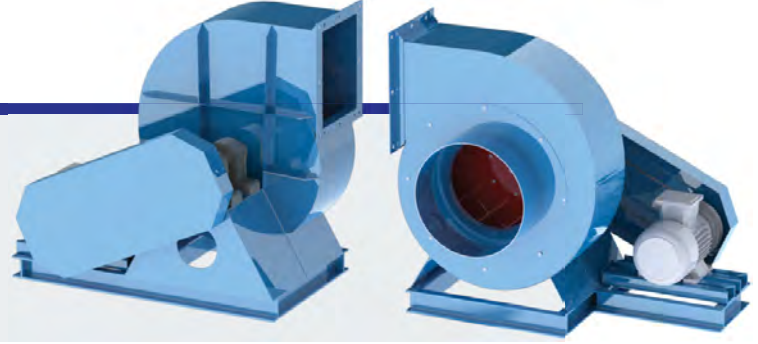

- 2.000 m³/h – 40.000 m³/h aralığında çalışmaktadır.
- Gövde DKP sactan üretilmiştir ve korozyona karşı elektrostatik toz boya ile korunmuştur.
- Pervane DKP sacdan üretilmiştir ve dinamik balansı alınmıştır.
- GAMAK, VOLT veya WATT marka direk akupule motor kullanılmıştır.
- Kayış kasnak tahriklidir.
- Sık kanatlı veya seyrek kanatlı olarak üretilebilir.
- Yalıtım : Class B
- Koruma Sınıfı : IP 44

Kullanım Alanları : Her türlü havalandırma işleminde kullanılabilir.

- Has airflow between 2.000 m³/h – 40.000 m³/h. Can be manufactured according to request.
- Casing and impeller are made from DKP sheet metal and protected against corrosion by electrostatic powder paint.
- Impeller is dynamically balanced.
- Designed and manufactured as belt-driven.
- Directly coupled motors with the brands of GAMAK, VOLT, WATT are used.
- Can be manufactured forward or backward curved impeller according to request.
- Insulation : Class B
- Protection : IP 44

Application Areas : Suitable for use in all ventilation applications.

TEKNİK DEĞERLER / TECHNICAL PARAMETERS

Tip Type	Voltaaj Voltage V	Frekans Frequency Hz	Beygir Gücü Horse Power Hp	Güç Power Kw	Devir Speed d/d	Hava Debisi Air Flow m ³ /h	Basınç Pressure Pa
KKRF-1-4K-M	220/380	50	0,50	0,37	1380	2000	350
KKRF-2-4K-M	220/380	50	1,00	0,75	1410	3750	400
KKRF-3-4K-M	220/380	50	1,50	1,10	1430	4500	450
KKRF-4-4K-M	220/380	50	2,00	1,50	1430	6000	500
KKRF-5-4K-M	220/380	50	3,00	2,20	1435	8500	550
KKRF-6-4K-M	220/380	50	4,00	3,00	1435	10250	600
KKRF-7-4K-T	380	50	5,50	4,00	1455	12500	650
KKRF-8-4K-T	380	50	7,50	5,50	1465	16500	700
KKRF-9-4K-T	380	50	10,00	7,50	1465	21000	750
KKRF-10-4K-T	380	50	15,00	11,00	1470	25000	850
KKRF-11-4K-T	380	50	20,00	15,00	1470	30000	1000
KKRF-12-4K-T	380	50	25,00	18,50	1475	35000	1100
KKRF-13-4K-T	380	50	30,00	22,00	1475	40000	1200

TEKNİK ÇİZİM VE ÖLÇÜLER / TECHNICAL DRAWINGS AND DIMENSIONS

Tip / Type	A	B	C	D	E	F	L
KKRF-1-4K-M	500	600	610	200	200	180	710
KKRF-2-4K-M	565	640	730	300	260	200	805
KKRF-3-4K-M	655	690	805	350	270	230	925
KKRF-4-4K-M	690	735	855	350	300	250	960
KKRF-5-4K-M	785	815	990	400	400	300	1085
KKRF-6-4K-M	875	865	1030	450	450	350	1175
KKRF-7-4K-T	920	935	1080	500	500	400	1250
KKRF-8-4K-T	975	1025	1210	600	600	450	1370
KKRF-9-4K-T	1035	1065	1220	600	600	500	1515
KKRF-10-4K-T	1080	1170	1380	700	700	550	1560
KKRF-11-4K-T	1200	1220	1485	750	800	600	1680
KKRF-12-4K-T	1260	1365	1535	800	800	600	1800
KKRF-13-4K-T	1350	1475	1650	850	850	600	1900

Ölçümler mm cinsindedir. / Dimensions are in (mm)

