


SLIM

Rulmanlı Motor
Ball-bearing Motor



TEKNİK DEĞERLER / TECHNICAL PARAMETERS

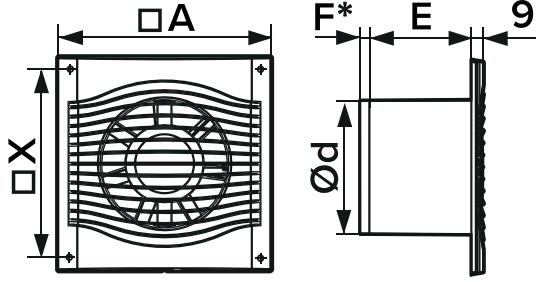

Düşük Enerji Tüketimi
Low Power Consumption



IP25
IP25



Motor Isınma Koruması
Motor Overheat Protection



ABS
ABS

| Tip Type | A | X | E | d | F |
|-------------|-----|-----|----|-----|-----|
| SLIM 4C | 160 | 140 | 76 | 100 | 7 |
| SLIM 5C | 180 | 160 | 82 | 125 | 5,5 |
| SLIM 6C | 205 | 187 | 86 | 150 | 10 |

| Tip Type | Çap Diameter | Voltaj Voltage | Güç Power | Hava Debisi Air Flow | Basınç Pressure | Anlık Tüketim C. Consumption | Ses Seviyesi Sound Pressure Level | Ambalaj Packing |
|-------------|-----------------|-------------------|--------------|-------------------------|--------------------|---------------------------------|--------------------------------------|--------------------|
| | Mm | V | Kw | m ³ /h | Pa | A | dB(A) | Adet |
| SLIM 4C | 100 | 220 | 7,8 | 90 | 39 | 0,04 | 25 | 8 |
| SLIM 5C | 125 | 220 | 10 | 140 | 44 | 0,05 | 30 | 8 |
| SLIM 6C | 150 | 220 | 10 | 250 | 54 | 0,05 | 33 | 8 |