




TEKNİK DEĞERLER / TECHNICAL PARAMETERS



Düşük Enerji Tüketimi
Low Power Consumption

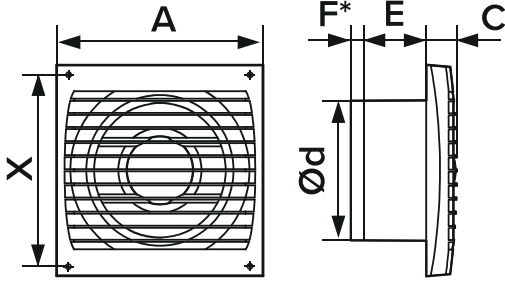

IP24
IP24



Motor Isınma Koruması
Motor Overheat Protection



ABS
ABS

Tip Type	A	X	E	d	C	F
ERA 4C	150	135	55	100	22	8
ERA 5C	175	160	61	125	23	10
ERA 6C	200	185	62	150	24	10

Tip Type	Çap Diameter	Voltaj Voltage	Güç Power	Hava Debisi Air Flow	Basınç Pressure	Anlık Tüketim C. Consumption	Ses Seviyesi Sound Pressure Level	Ambalaj Packing
	Mm	V	Kw	m³/h	Pa	A	dB(A)	Adet
ERA 4C	100	220	14	97	28	0,06	35	8
ERA 4C ET (Timer)	100	220	14	97	28	0,06	35	8
ERA 5C	125	220	16	183	50	0,07	36	8
ERA 5C ET (Timer)	125	220	16	183	50	0,07	36	8
ERA 6C	150	220	16	290	42	0,07	38	8
ERA 6C ET (Timer)	150	220	16	290	42	0,07	38	8