

KMP

KOVANLI HARİCİ MOTORLU SANAYİ TİPİ ASPIRATÖRLER TUBE FANS



- 3.500 m³/h – 50.000 m³/h hava debisi aralığında çalışmaktadır.
- Gövde ve pervane DKP sacdan imal edilmiş olup korozyona karşı elektrostatik toz boya ile korunmuştur.
- Pervanenin dinamik balansı alınmıştır.
- GAMAK, VOLT veya WATT Marka direkt akuple harici motor kullanılmıştır.
- İsteğe bağlı olarak yüksek sıcaklıklarda çalışmak üzere üretim yapılabilir.
- Yalıtım : Class B
- Koruma Sınıfı : IP 44

Kullanım Alanları : Her türlü geniş alan havalandırmasında kullanıma uygundur.

- Has airflow between 3.500 m³/h – 50.000 m³/h.
- Casing and impeller are made of DKP sheet metal and protected against corrosion by electrostatic powder paint.
- Impeller is dynamically balanced.
- Directly coupled motors with the brands of GAMAK, VOLT, WATT are used.
- Can be manufactured for using in the places that has high temperature according to request.
- Insulation : Class B
- Protection : IP 44



Application Areas : Suitable for use in all kind of wide place ventilation applications.

TEKNİK TABLO / TECHNICAL PARAMETERS

Tip Type	Voltaaj Voltage V	Frekans Frequency Hz	Beygir Gücü Horse Power Hp	Güç Power Kw	Devir Speed d/d	Hava Debisi Air Flow m ³ /h	
KMP-300-4K-M	KMP-300-4K-T	220 / 380	50	0,50	0,37	1380	3500
KMP-350-4K-M	KMP-350-4K-T	220 / 380	50	0,50	0,37	1380	4000
KMP-400-4K-M	KMP-400-4K-T	220 / 380	50	0,50	0,37	1380	5000
KMP-400-4K-M	KMP-450-4K-T	220 / 380	50	0,50	0,37	1380	6000
KMP-500-4K-M	KMP-500-4K-T	220 / 380	50	1,00	0,75	1410	8000
KMP-560-4K-M	KMP-560-4K-T	220 / 380	50	1,00	0,75	1410	10000
KMP-630-4K-M	KMP-630-4K-T	220 / 380	50	2,00	1,50	1430	14000
KMP-710-4K-M	KMP-710-4K-T	220 / 380	50	3,00	2,20	1435	16000
KMP-800-4K-T		380	50	5,50	4,00	1455	25000
KMP-900-4K-T		380	50	7,50	5,50	1465	35000
KMP-1000-6K-T		380	50	7,50	5,50	960	40000
KMP-1100-6K-T		380	50	7,50	5,50	960	45000
KMP-1200-6K-T		380	50	10,00	7,50	960	50000

TEKNİK ÇİZİM VE ÖLÇÜLER / TECHNICAL DRAWINGS AND DIMENSIONS

Tip / Type	D	D1	L
KMP-300-4K-M/T	300	370	300
KMP-350-4K-M/T	350	420	325
KMP-400-4K-M/T	400	470	350
KMP-450-4K-M/T	450	520	400
KMP-500-4K-M/T	500	570	400
KMP-560-4K-M/T	560	630	450
KMP-630-4K-M/T	630	700	475
KMP-710-4K-M/T	710	780	525
KMP-800-4K-T	800	870	550
KMP-900-4K-T	900	970	600
KMP-1000-4K-T	1000	1100	600
KMP-1100-4K-T	1100	1200	700
KMP-1200-4K-T	1200	1300	750

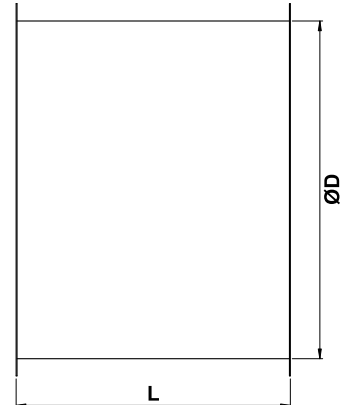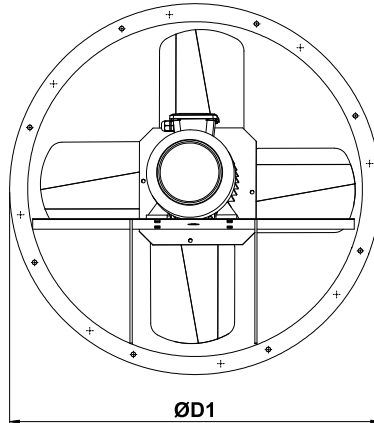

Ölçümler mm cinsindedir. / Dimensions are in (mm)